

USE OF PRODUCT

PRIME Square Luminaire Series may be used in hospitality, commercial, retail, and residential applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source. This product is for indoor use only.

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management.

LED DRIVER

Durable dimmable driver provides high power factor with optimum thermal management to prevent damage caused by high temperature.

HOUSING

Rugged aluminum housing.

OPTICS

Field replaceable optical lens available in 18°, 30°, 50°, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 Maximum).

MOUNTING

The PRIME Cylinder Series may be cable hung, stem mount, surface mount or wall mounted.

DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (PEQ1) Lutron Hi-Lume Premier Ecosystem 1% w/soft on, fade to black

dimming, (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-Lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

LABELS / COMPLIANCE

- CSA Listed for US and Canada
- Damp rated
- 5 year limited warranty.



ORDERING INFORMATION

RPA

Diameter Shape Length Directional Lumens Color Temp. Voltage Dimming Optical Lens Filter Bevel Finish Cylinder Finish Mounting Option


Series	Diameter	Shape	Length	Directional	Lumens	Color Temperature	Voltage	Dimming	Optical Lens ⁵	Filter	Bevel Finish	Cylinder Finish	Mounting	Option	
RPA PRIME Series	4 - 5"	SL - Square Luminaire	10 - 10"	DL - Down Light	10L - 1035 lm	27 - 2700K	UNV - 120-277	ID ¹						Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	
				UP - Up Light	13L - 1280 lm	30 - 3000K		PEQ0						Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming	
					16L - 1625 lm	35 - 3500K		LDE1						Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	
					21L - 2115 lm	40 - 4000K		LDES						Lutron Hi-Lume 5% Ecosystem	
					24L - 2480 lm			L3DA						Hi-lume 1% EcoSystem/3-Wire L3D Driver	
								EEI ^{3,4}						eldoLED Eco 1% Dim (0-10V)	
														EDIO ^{3,4}	eldoLED Solo 0.1% Dim (0-10V)
														EDID ^{3,4}	eldoLED Solo 0.1% Dim (DALI)
Optical Lens ⁵	Filter	Bevel Finish	Cylinder Finish	Mounting	Option										
18 - 18°	None - Leave blank	W - White	BL - Black	PH - Pendant	LAW - Lutron Athena Wireless Node (RF only version)										
30 - 30°	F - Frosted Filter	B - Black	WH - White	SC - Single Cable											
50 - 50°	H - Honey comb	H - Haze	SL - Silver	DC - Double Cable											
80 - 80°	S - Solite filter	S - Specular Clear	MTO - Made to order	TC - Triple Cable											
		WE - Wheat		SM - Surface Mount											
		MTO - Made to order		WM - Wall Mount											

1. Intelligent Drive is the standard driver.
 2. 120V only.
 3. Must specify logarithmic or linear eldoLED driver.
 4. Confirm dimming curve: linear or logarithmic.
 5. Without standard frosted acrylic diffuser




LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
11W	1035 lm	120 - 277V	93+
16W	1280 lm	120 - 277V	93+
20W	1625 lm	120 - 277V	93+
30W	2115 lm	120 - 277V	93+
31W	2480 lm	120 - 277V	93+


*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
 **Lumens will vary based on CCT, optical lens, and bevel finish.

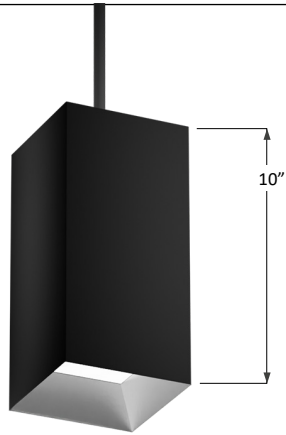


TRIM HEIGHT

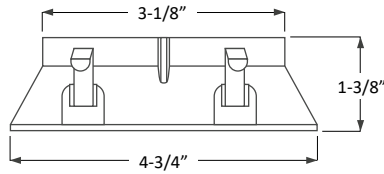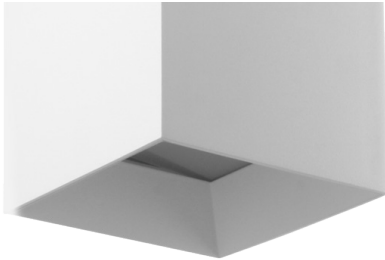



LED HOLDER & FILTER DIMENSION



Filter




LED Holder



Light Enhancer

MOUNTING INFO

CABLE HUNG DIMENSION

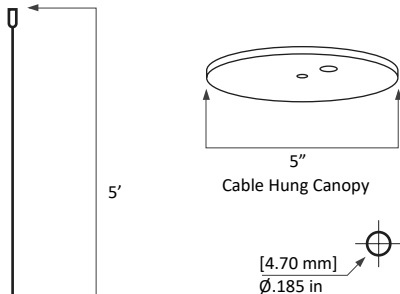

3/64" Galvanized Cable Fuse Cut with Die Cast #1 Stop
 Available in 24", 36", 50", 72", 100", 120", & 150" Lengths
 7x7 Cable - MAX LOAD 270 lbs

STEM MOUNT DIMENSION

