


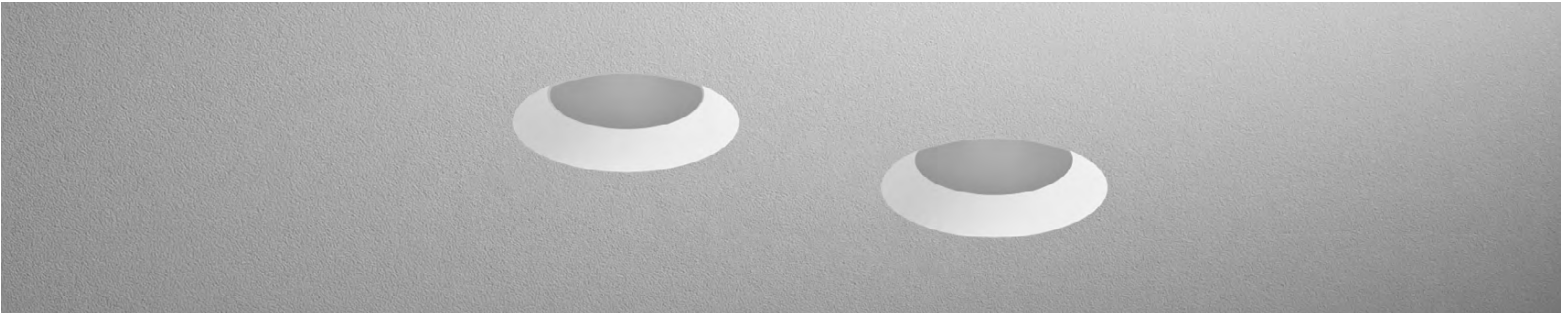

USE OF PRODUCT

The Spaced Aperture series is designed for commercial, hospitality, retail, education, and premium residential applications. This multi-aperture recessed luminaire enhances both lighting performance and ceiling aesthetics. By integrating multiple precision light sources within a single housing, the design promotes uniform spacing, simplifies installation, minimizes ceiling penetrations, and delivers a clean, sophisticated architectural appearance.

LED ENGINE

LED engine available in 2700K, 3000K, 3500K, or 4000K in standard 90+ CRI. 2-step MacAdam ellipse allows for color consistency between fixtures. The LED is mounted to an aluminum heat sink for maximum life output and thermal management. LED engine is accessible from below the ceiling.

OPTICAL LENS

Field replaceable optical lenses are available in 12°, 30°, 35°, 40°, and 50°. Easily achieve narrow spot to wide flood beam pattern.

FRAME CONSTRUCTION

IC and Non-IC rated housing are constructed from a 16-gauge heavy-duty, powder-coated cold-rolled steel frame and includes a junction box with ½" knockouts. Butterfly brackets (included) accommodate universal or C-channel hangers (order separately).

ADJUSTMENT

- Housing supports 359° locking rotation.
- Aperture collar compatible up to 1½" ceiling thickness. Consult factory for made-to-order aperture collars exceeding 1½".

DIMMING

Available in six driver selections. (ID) Standard all-inclusive ELV (120V), Triac (120V), and 0–10V (120–277V) dimming driver called Intelligent Drive. (EEIS) eldoLED 1% Dim 0-10V (120-277V), Triac (120V), Max 20W. (EDIO) eldoLED 0.1% Dim (0–10V), 120–277V. (EDID) eldoLED 0.1% Dim (DALI), (EDD) eldoLED 1% Dim (DALI2), (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% with Soft-on, Fade-to-Black Dimming. Drivers are accessible from below the ceiling.

BEVEL

Bevel includes standard frosted acrylic diffuser. Remove standard frosted acrylic diffuser in field for 7% lumens increase. Consult factory for made-to-order finishes. Wet location for bathrooms and showers with standard lens on trim.

EMERGENCY BATTERY

Optional Emergency Battery (EM) available in 8W (≈800 lm), or 15W (≈1,500 lm) available for a minimum of 90 minutes.

LABELS/COMPLIANCE/WARRANTY

- CSA listed for US and Canada
- Energy Star certified product
- Dry/Damp/Wet location rated
- State of California Title 24 and JA8 compliant
- Chicago Plenum with IC Housing
- 5-year limited warranty

GENERAL PERFORMANCE CHART


*Detailed performance chart may be found on page 3

PER MODULE	6W	9W	12W	15W	20W
Initial Lumens	657/955	890/1296	1122/1618	1267/2015	1485/2422
Delivered Lumens	599-784	809-1074	969-1360	1094-1685	1284-2070

* Values are listed at 3000K, 90+ CRI with a white bevel & trim.
Delivered lumens range based on beam spread.
Performance may vary +/- 5%



BEAM SPREAD

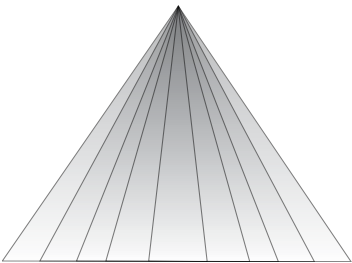

Available optics: 12° 30° 35° 40° 50°

- Field replaceable TIR optics
- Easily achieve narrow spot to wide flood beam pattern
- Optional filters available upon request

PRIME FAMILY OF PRODUCTS




Downlight




TechZone®



WoodWorks®



Multiple Dedicated Bevel



Multiple Open Bevel



Cylinder



Square Luminaire

ORDERING INFORMATION

Series	Aperture Type	Module Configuration	Wattage Per Module	Dimming	Color Temperature
RPA2	SA - Spaced Aperture	2 - Two Module 3 - Three Module 4 - Four Module 4S - Four Module Square	6W - 6 Watt 9W - 9 Watt 12W - 12 Watt 15W - 15 Watt 20W ¹ - 20 Watt	ID ² - Standard All-Inclusive ELV(120V), Triac(120V), and 0-10V(120-277V) Dimming Driver (Intelligent Drive) EEIS ³ - eldoLED 1% Dim 0–10V (120-127V), Triac (120V) EDIO ⁴ - eldoLED 0.1% Dim (0–10V) EDID ⁴ - eldoLED 0.1% Dim (DALI) EDD ⁴ - eldoLED 1% Dim (DALI2) PEQO - Lutron Hi-Lume Premier Ecosystem 0.1% with Soft-on, Fade-to-Black Dimming	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K

Optical Lens	Filter	Housing Type	Collar	Module Type	Trim Style
12 ⁵ - 12° 30 - 30° 35 - 35° 40 - 40° 50 - 50°	None - Included F - Frosted Filter H - Honey Comb S - Solite Filter L - Linear Filter	IC ⁶ - IC Air-Tight New Construction NC - Non-IC New Construction	CR10 - 1.0" Depth CR15 - 1.5" Depth MTO - Made To Order	FMH - Downlight	LPR - Flangeless Plaster LDMR - Flangeless Millwork with Dedicated Collar

Frame Accessories	Options	Notes
UH - Universal Bar Hanger	ER8WR ⁷ - 8W Remote Emergency Battery with Remote test switch (800 lm) ER15WR ⁷ - 15W Remote Emergency Battery with Remote test switch (1,500 lm) CP ⁸ - Chicago Plenum	1. Not available in IC housing. 2. Intelligent Drive is the standard driver. 3. Driver programmed only in linear mode. 4. Must specify logarithmic or linear eldoLED diver. 5. 12° spread without lens on trim. 6. Not available in 20W. 7. Ceiling access is required for IC housing to replace the EM unit. 8. Requires IC housing.

TRIM ORDERING INFORMATION

DIE-CAST

Bevel Finish	Bevel	Finish
2" Round Flangeless Regress Large Opening	2RLO-CL	W - White
	2RLO-CL	B - Black
	2RLO-CL	H - Haze
	2RLO-CL	BZ - Bronze
	2RLO-CL	C - Clear
	2RLO-CL	MTO - Made To Order

PERFORMANCE CHART (PER MODULE)

Optics		¹ 12°	30°	35°	40°	50°
6W	Initial Lumens	657	955	955	955	955
	Delivered Lumens	599	730	784	774	745
	UGR		16.6	14.9	18	19.3
9W	Initial Lumens	890	1296	1296	1296	1296
	Delivered Lumens	809	995	1074	1065	1014
	UGR		17.7	16	19.2	20.3
12W	Initial Lumens	1122	1618	1618	1618	1618
	Delivered Lumens	969	1249	1360	1353	1272
	UGR		18.5	16.9	20.2	21.8
15W	Initial Lumens	1267	2015	2015	2015	2015
	Delivered Lumens	1094	1533	1685	1614	1580
	UGR		18.8	17.5	20.9	22.8
20W	Initial Lumens	1485	2422	2422	2422	2422
	Delivered Lumens	1284	1858	2070	1956	1916
	UGR		19.4	18.3	21.6	23.5


* Values are listed at 3000K, 90+ CRI with a white bevel & trim.

- Notes
1. 12° spread without lens on trim

COLOR TEMPERATURE MULTIPLIER FOR DELIVERED LUMENS

2700K	3000K	3500K	4000K
0.95	1.00	1.04	1.07



2RLO-CL REGRESS LARGE OPENING

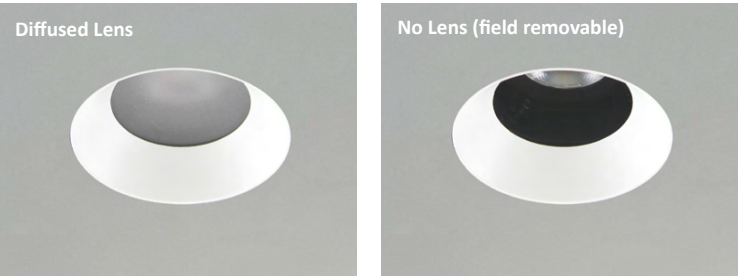


- IES files are based on the large opening trim with diffused lens.
- Not suitable for wet locations
 - Increase in lumens by approximately 7%

2 MODULE HOUSING DIMENSIONS

NC - Non-IC New Construction


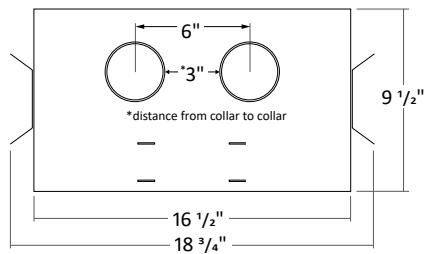


- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance



The distance from bevel to bevel is 4 19/32"
(Shown without LPR)



IC - IC Air-Tight New Construction

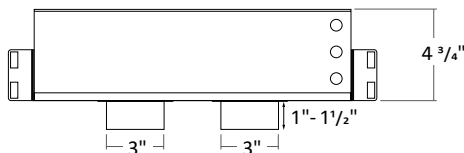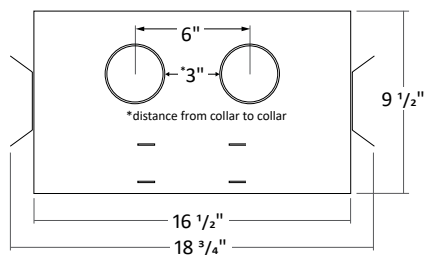


- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance

3 MODULE HOUSING DIMENSIONS

NC - Non-IC New Construction

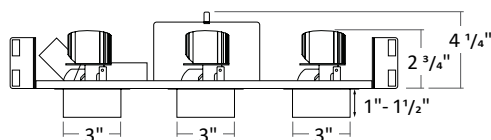
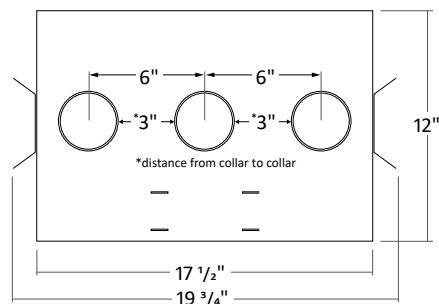


- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance



The distance from bevel to bevel is 4 19/32"
(Shown without LPR)

IC - IC Air-Tight New Construction

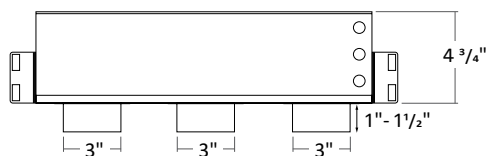
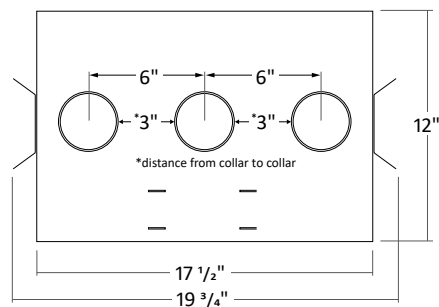


- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance


2" ARCHITECTURAL SPACED APERTURE (TWO MODULE) ROUND FLANGELESS DOWNLIGHT

4 MODULE HOUSING DIMENSIONS

NC - Non-IC New Construction

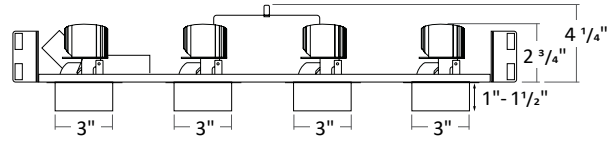
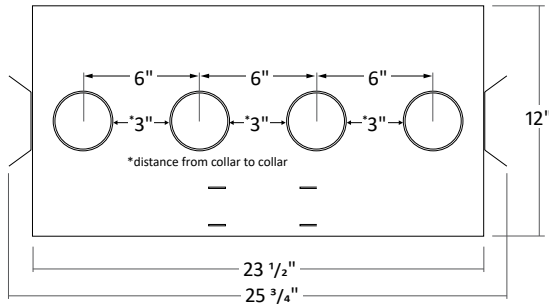


- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance



The distance from bevel to bevel is 4 15/16"
(Shown without LPR)



IC - IC Air-Tight New Construction

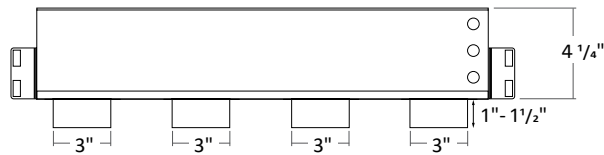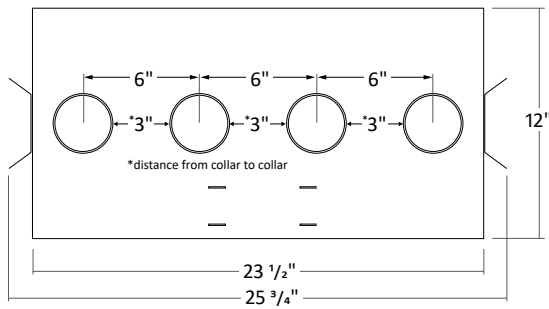


- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance

4 MODULE SQUARE HOUSING DIMENSIONS

NC - Non-IC New Construction

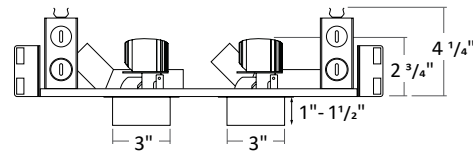
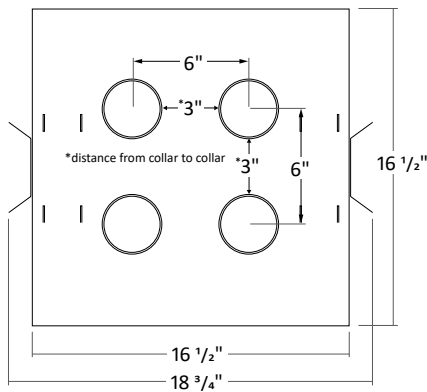


- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance



The distance from bevel to bevel is 4 15/16"
(Shown without LPR)


IC - IC Air-Tight New Construction

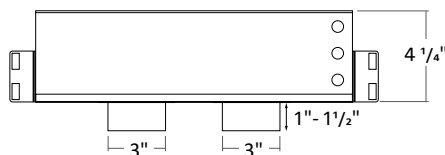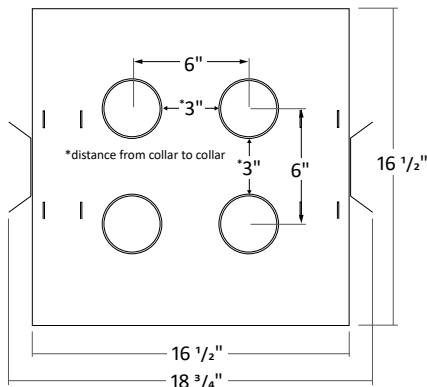

- Must remove spacer to achieve 1 1/2" collar height
- Consult factory for Made to Order collar height
- Allow 1/8" tolerance

2" ARCHITECTURAL SPACED APERTURE (TWO MODULE) ROUND FLANGELESS DOWNLIGHT

FRAME ACCESSORIES

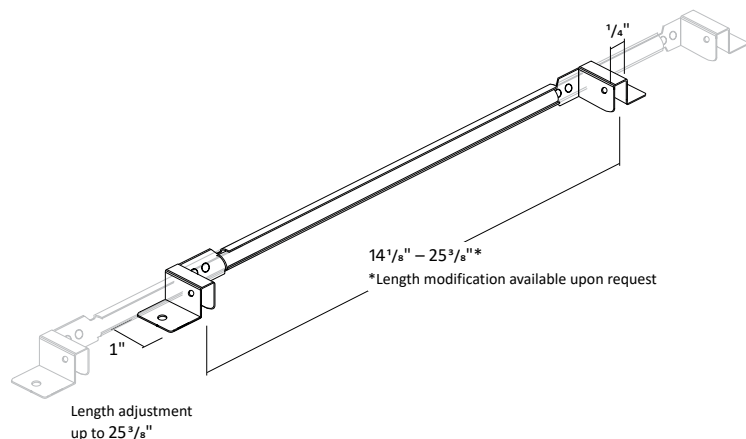


UNIVERSAL BAR HANGER



COMPATIBLE CEILING

- Hat Channel
- T-Bar
- C-Channel
- Laminated Wood
- Quick-Span
- I-Beam
- Standard Joist

FLANGELESS PLASTER (LPR)

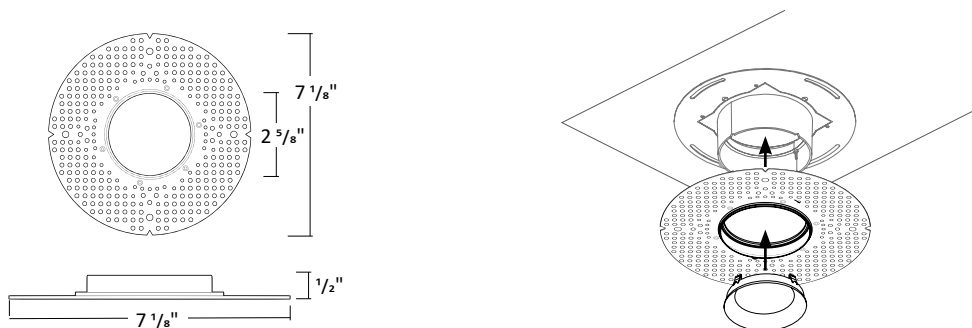


FLANGELESS MILLWORK WITH DEDICATED COLLAR (LDMR)

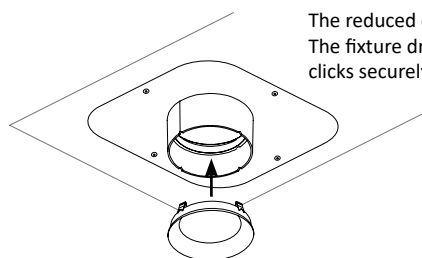


The reduced collar diameter allows for easy installation. The fixture drops into the ceiling opening and the bevel clicks securely into the collar.


LED MODULE

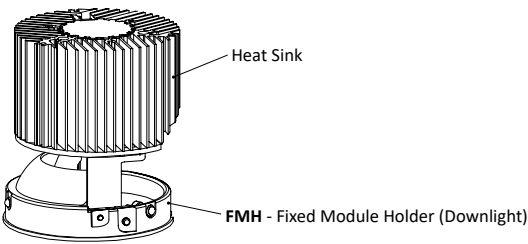


FILTERS



Frosted Filter



Honey Comb






Solite Filter



Linear Filter

TRIM DIMENSIONS

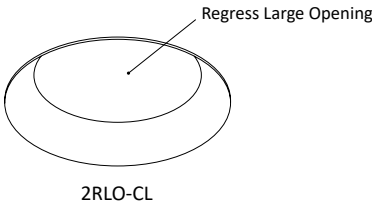

TRIM FINISH

White

Black

Haze

Bronze

Clear

*Consult Factory for Made to Order Finishes