


## ARCHITECTURAL RECESSED MULTIPLE DEDICATED BEVEL

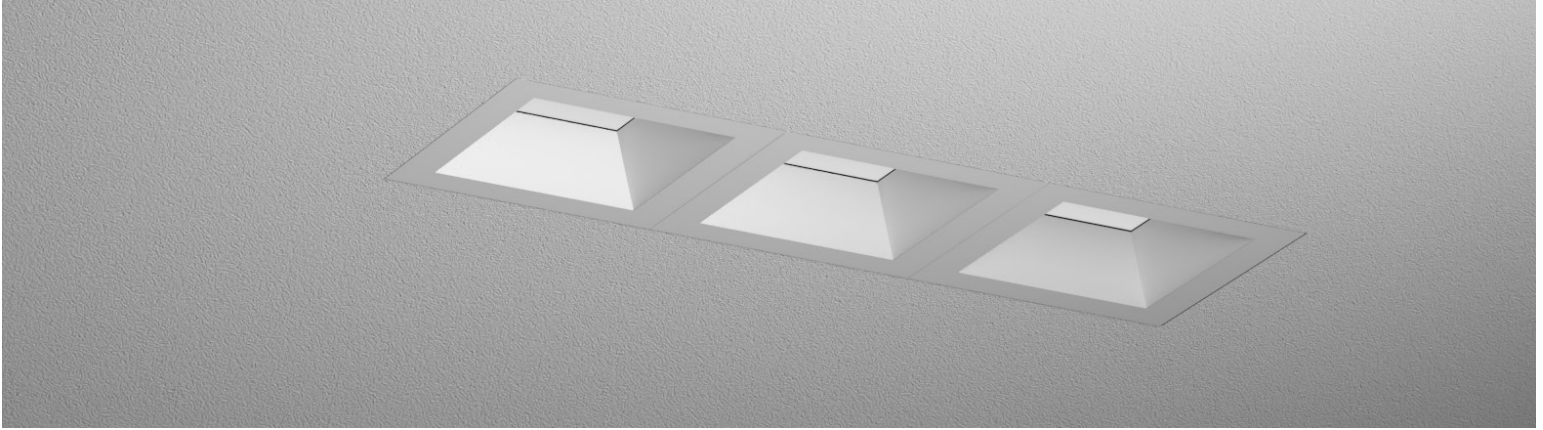

### USE OF PRODUCT

The PRIME Architectural Recessed Multiple Series is offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance.

### LED MODULE

Cree LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. LED module is field replaceable.

### FRAME CONSTRUCTION

Constructed from 20 gauge cold rolled steel with powder coat finish.

### ADJUSTMENT

0-35° Hot aiming.

### OPTICS

Field replaceable TIR optics available in 18°, 30°, 50°, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

### DIMMING

Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-Lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are integral and are field replaceable.

### THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

### MOUNTING

Butterfly brackets available to accommodate Adjustable bar hanger, C-channel bar hanger and Flat bar hanger.

### LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada  
- 5 Year limited warranty



## ORDERING INFORMATION

Series	Aperture Type	Module Configuration	Lumen per head	Color Temperature	Voltage	Dimming
RPA3	DB - Dedicated Bevel	1 - One module	8L - Medium module in 800 lm	27 - 2700K	UNV - 120-277V	ID <sup>1</sup> - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0- Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming LDE1 <sup>2</sup> - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming L3DA- Hi-Lume 1% EcoSystem/3-Wire L3D Driver EEI <sup>2</sup> - eldoLED Eco 1% Dim (0-10V) EDIO <sup>2,3</sup> - eldoLED Solo 0.1% Dim (0-10V) EDID <sup>2,3</sup> - eldoLED Solo 0.1% Dim (DALI)
PRIME		2 - Two module	11L - Medium module in 1175 lm	30 - 3000K	120 - 120V	
Series		3 - Three module	16L - Medium module in 1650 lm	35 - 3500K		
			MTO - Made to order		40 - 4000K	



Optical Lens	Filter	Housing Type	Aperture	Frame Accessories	Options
18 - 18°	None - Leave blank F - Frosted filter H - Honey comb S - Solite filter	IC - IC Air-tight New Construction	SFA - Square Flange Adjustable	UH <sup>4</sup> - Universal bar hanger C - C-Channel bar hanger B - Flat bar hanger	EM - Emergency Battery LAW - Lutron Athena Wireless Node (RF only version)
30 - 30°		ICP - IC New Const. Chicago Plenum			
50 - 50°		NC - Non-IC New Construction			
80 - 80°					

## TRIM ORDERING INFORMATION



Aperture Size / Shape / Trim Type / Style	Bevel Opening	Bevel	Flange	Options
3SFO - 3" Square Flange Open	CL - Die cast large opening	W - White B - Black H - Haze BZ - Bronze C - Clear MTO - Made to order	W - White B - Black BZ - Bronze MTO - Made to order	WL - Wet Location

- Notes**
- Intelligent Drive is the standard driver.
  - Ceiling access required.
  - Must specify logarithmic or inear eldoLED driver.
  - Requires IC Housing


### DIMENSIONS

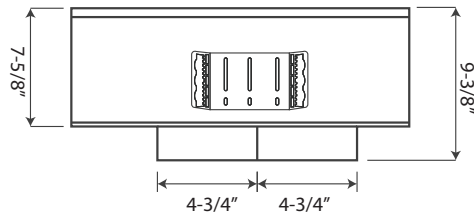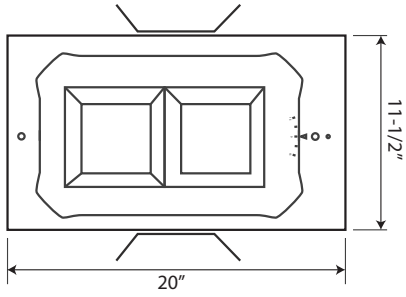

### ADJUSTABILITY

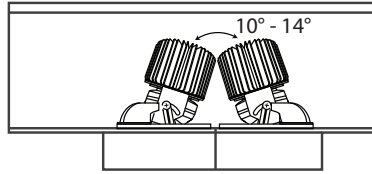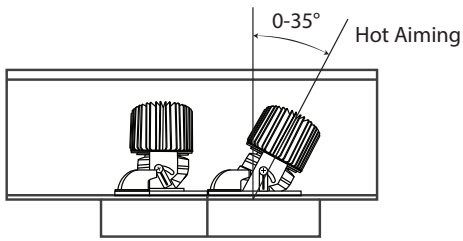

### LED HOLDER & FILTER ASSEMBLY

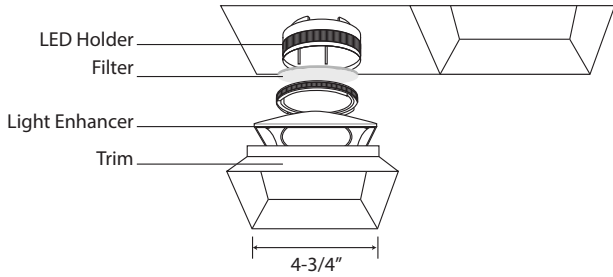

### HOUSING TYPE

