

3" ARCHITECTURAL ROUND FLANGE DOWNLIGHT COMPATIBLE WITH 6" TECHZONE® CEILINGS  
(SILHOUETTE®, SUPRAFINE®, INTERLUDE®, OR PRELUDE®) BY ARMSTRONG®



#### USE OF PRODUCT

The 3" Prime Downlight is a small aperture fixture which is compatible with 6" TechZone® ceilings. Allows for seamless installation and integration of luminaires with Silhouette®, Suprafine®, Interlude®, or Prelude® ceiling types offered by Armstrong®. Available options include die-cast trims, various temperatures, optics, and dimmable drivers.

#### LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 90+ CRI. 2-step MacAdam ellipse allows for color consistency between fixtures. The LED is mounted to an aluminum heat sink for maximum life output and thermal management. LED engine is accessible from below the ceiling.

#### FRAME CONSTRUCTION

Non IC housing constructed from 20-gauge cold-rolled steel and includes a junction box with  $\frac{1}{2}$ " knockouts. Integrated mounting brackets that will snap directly into 6" TechZone® ceiling grids. Compatible with the following series: Silhouette®, Suprafine®, Interlude®, or Prelude®.

#### GENERAL PERFORMANCE CHART

\*Detailed performance chart may be found on page 3


	6W	9W	12W	15W	20W
Initial Lumens	657/955	890/1296	1122/1618	1267/2015	1485/2422
Delivered Lumens	586-755	794-1038	999-1319	1060-1642	1244-1985

\* Values are listed at 3000K, 90+ CRI with a white bevel & trim.

Delivered lumens range based on beam spread.

Performance may vary +/- 5%

#### BEAM SPREAD

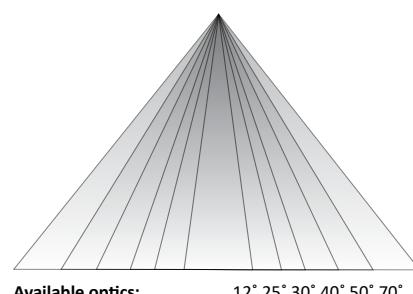

- Field replaceable TIR optics
- Easily achieve narrow spot to wide flood beam pattern
- Optional filters available upon request

#### PRIME FAMILY OF PRODUCTS




Downlight




TechZone®



WoodWorks®




Multiple Dedicated Bevel



Multiple Open Bevel



Cylinder



Square Luminaire

3" ARCHITECTURAL ROUND FLANGE DOWNLIGHT COMPATIBLE WITH 6" TECHZONE® CEILINGS  
(SILHOUETTE®, SUPRAFINE®, INTERLUDE®, OR PRELUDE®) BY ARMSTRONG®

## ORDERING INFORMATION

Series	Wattage	Dimming	Color Temperature	Optical Lens	Filter
RPA3	6W - 6 Watt	ID <sup>1</sup> - Standard All-Inclusive ELV, Triac, and 0-10V Dimming Driver (Intelligent Drive)	27 - 2700K	12 <sup>4</sup> - 12°	None - Leave Blank
	9W - 9 Watt	LDE1 <sup>2</sup> - Lutron Hi-Lume 1% Ecosystem with Soft-on, Fade-to-Black Dimming	30 - 3000K	25 - 25°	F - Frosted Filter
	12W - 12 Watt	L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver	35 - 3500K	30 - 30°	H - Honey Comb
	15W - 15 Watt	EEI <sup>3</sup> - eldoLED Eco 1% Dim (0-10V)	40 - 4000K	40 - 40°	S - Solite Filter
	20W - 20 Watt	EDI <sup>3</sup> - eldoLED Solo 0.1% Dim (0-10V)		50 - 50°	L - Linear Filter
		EDI <sup>3</sup> - eldoLED Solo 0.1% Dim (DALI)		70 - 70°	

Housing Type	Frame Accessories	Aperture	Options
TZ6 - 6" TechZone® Ceiling	UH - Universal Bar Hanger	RFD - Round Flange Downlight	<b>ER8W</b> - Emergency Battery with Remote test switch (800 lm) <b>ER15W</b> - Emergency Battery with Remote test switch (1,500 lm)

## DIE-CAST

Bevel / Flange Finish	Trim Type	Bevel	Flange	Notes
May be mixed and matched				
3" Round Flange Open Large	3RFO-CL	W - White	W - White	1. Intelligent Drive is the standard driver.
	3RFO-CL	B - Black	B - Black	2. Not offered in 6W.
	3RFO-CL	H - Haze	BZ - Bronze	3. Must specify logarithmic or linear eldoLED driver.
	3RFO-CL	BZ - Bronze	MTO - Made To Order	4. 12" spread without lens on trim.
	3RFO-CL	MTO - Made To Order		
3" Round Flange Open Small	3RFO-CS	W - White	W - White	
	3RFO-CS	B - Black	B - Black	
	3RFO-CS	H - Haze	BZ - Bronze	
	3RFO-CS	BZ - Bronze	MTO - Made To Order	
	3RFO-CS	MTO - Made To Order		

3" ARCHITECTURAL ROUND FLANGE DOWNLIGHT COMPATIBLE WITH 6" TECHZONE® CEILINGS  
(SILHOUETTE®, SUPRAFINE®, INTERLUDE®, OR PRELUDE®) BY ARMSTRONG®

## PERFORMANCE CHART

Optics	12°	25°	30°	40°	50°	70°
6W	Initial Lumens	657	955	955	955	955
	Delivered Lumens	586	718	755	754	726
	UGR		13.5	13	16.4	19.1
9W	Initial Lumens	890	1296	1296	1296	1296
	Delivered Lumens	794	978	1034	1038	984
	UGR		14.6	14.3	17.7	19.6
12W	Initial Lumens	1122	1618	1618	1618	1618
	Delivered Lumens	999	1225	1314	1319	1238
	UGR		15.2	15.1	18.3	21.2
15W	Initial Lumens	1267	2015	2015	2015	2015
	Delivered Lumens	1060	1470	1628	1642	1565
	UGR		15.9	15.8	19	21.9
20W	Initial Lumens	1485	2422	2422	2422	2422
	Delivered Lumens	1244	1778	1967	1985	1895
	UGR		16.6	16.4	19.7	22.5

\* Values are listed at 3000K, 90+ CRI with a white bevel & trim.


## Notes

1. 12° spread without lens or trim


## COLOR TEMPERATURE MULTIPLIER FOR DELIVERED LUMENS

2700K	3000K	3500K	4000K
0.95	1.00	1.04	1.07

## HOUSING DIMENSIONS

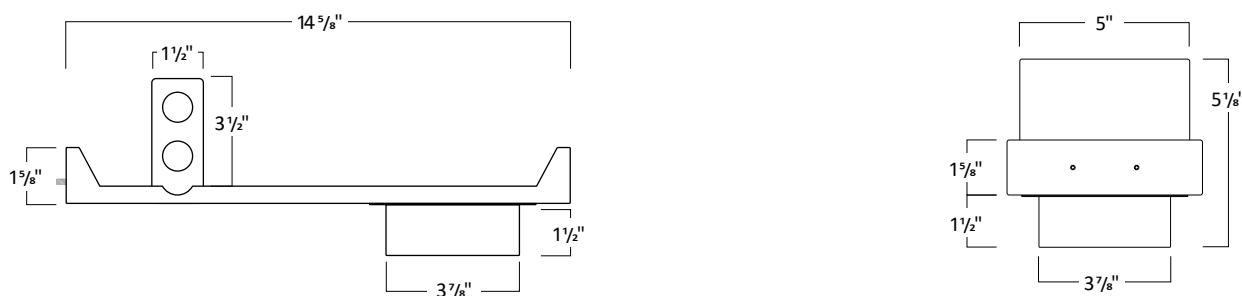

## MODULE DIMENSIONS

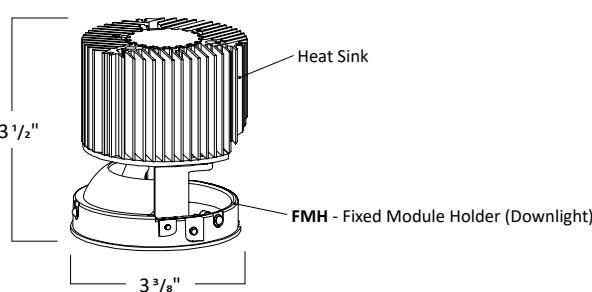


3" ARCHITECTURAL ROUND FLANGE DOWNLIGHT COMPATIBLE WITH 6" TECHZONE® CEILINGS  
(SILHOUETTE®, SUPRAFINE®, INTERLUDE®, OR PRELUDE®) BY ARMSTRONG®

## FRAME ACCESSORIES

### UNIVERSAL BAR HANGER

#### COMPATIBLE CEILING

- Hat Channel
- T-Bar
- C-Channel
- Laminated Wood
- Quick-Span
- I-Beam
- Standard Joist

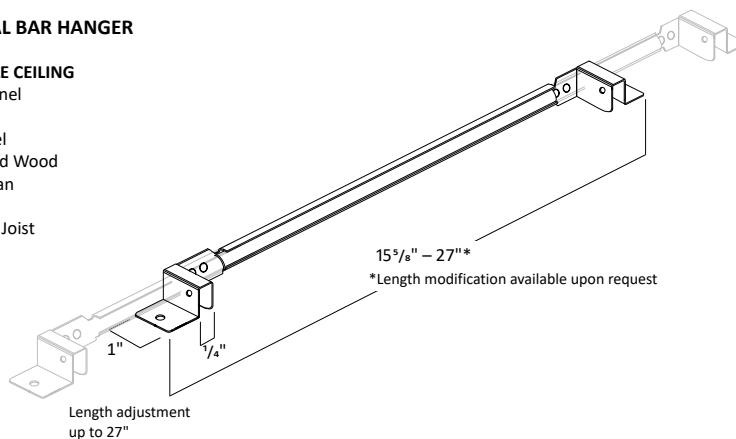


## FILTERS



Frosted Filter



Honey Comb




Solite Filter





Linear Filter

## TRIM DIMENSIONS




#### DIE-CAST



3RFO-CS

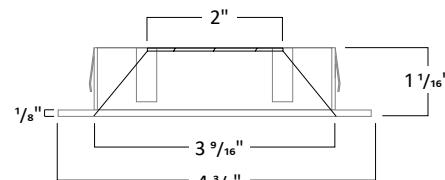

3RFO-CL

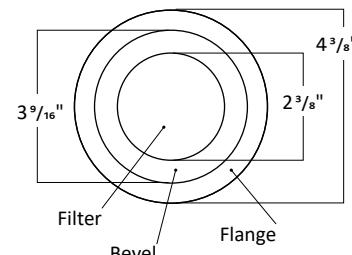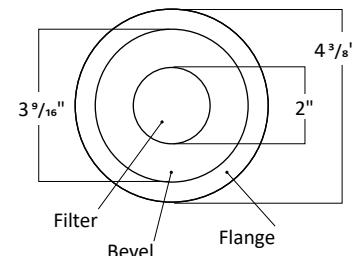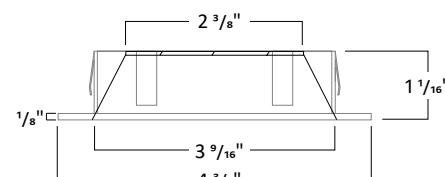

#### TRIM FINISH

May be mixed and matched



White



Black



Haze



Bronze

\*Consult Factory for Made to Order Finishes