



USE OF PRODUCT

The 6" Prime Turtle friendly Series is suitable for use in ecologically sensitive areas, sea turtle nesting areas, migratory corridors and Dark Sky friendly communities. Light produced by the Amber LED is visible to humans and can be safely used for outdoor lighting applications, but it is virtually undetectable to sea turtles and other forms of marine wildlife.

LED ENGINE

Amber color temperature for optimal spectral power distribution for preservation of endangered sea turtle populations.

FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

ADJUSTMENT

- Housing provides for 360° locking rotation
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment
- Collar notch allows for easy alignment for square applications.
- Aperture collar compatible up to 1½" ceiling thickness.
- Accommodation for 2" or 3" ceiling thickness available upon request.

OPTICS

Field replaceable optical lens available in 30°, 50°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING

Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

TRIM OPTIONS

- All trims are self flanged die cast or anodized.
- Trim includes standard frosted acrylic diffuser.
- 12% lumens increase if remove standard frosted acrylic diffuser in field.
- Optical Enhancer reflects light evenly across the diffusion lens.
- Trims available in round or square in an assortment of standard or made to order finishes.

LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Certified FWC
- 5 Year limited warranty



ORDERING INFORMATION

RPA


Series	Aperture size	Lumens	Color Temperature	Voltage	Dimming	Optical Lens ⁵	Filter
RPA	6 - 6"	5L - 500 lm	A - Amber	UNV - 120-277 120 - 20V 347 ¹ - 347V	ID ² Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0 Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming LDE1 Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming L3DA Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI ⁴ eldoLED Eco 1% Dim (0-10V) EDIO ⁴ eldoLED Solo 0.1% Dim (0-10V) EDID ⁴ eldoLED Solo 0.1% Dim (DALI)	30 - 30° 50 - 50°	None - Leave blank F - Frosted filter H - Honey comb S - Solite filter

Housing Type	Aperture	Frame Accessories	Collar	Options
NC - Non-IC New Construction IC - Air-tight New Construction	SLDP - Square Flangeless Downlight Plaster SLDM - Square Flangeless Downlight Milwork	UH ⁶ - Universal bar hanger C - C-Channel bar hanger B - Flat bar hanger	Blank - 1.5" Depth 2 - 2" Depth 3 - 3" Depth MTO - Made to order	EI8 - Emergency battery with integral switch(800 Lumens) ER8 - Emergency battery with remote switch (800 Lumens) EI17 - Emergency battery with integral switch(1700 Lumens) ER17 - Emergency battery with remote switch (1700 Lumens) FCJS-E - Vive wireless individual controller(Ecosystem) FCJS-0 - Vive wireless individual controller(0-10) LAW - Lutron Athena Wireless Node (RF only version) CP ⁶ - Chicago Plenum

TRIM ORDERING INFORMATION


Aperture Size / Shape / Trim Type / Style	Bevel Finish	Options
6SLO - 6" Square Flangeless Open	W - White B - Black H - Haze S - Specular clear WE - Wheat MTO - Made to order	WL - Wet Location

1. Step down transformer required.
2. Intelligent Drive is the standard driver.
3. 120V only.
4. Must specify logarithmic or linear eldoLED diver.
5. Without standard frosted acrylic diffuser.
6. Requires IC Housing

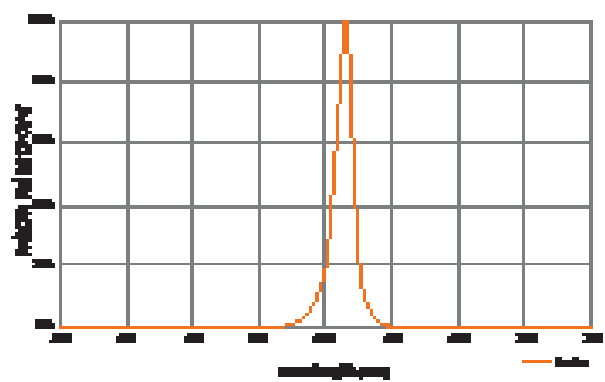


Color	Temperature: Warm White, Daylight				Power Factor: 0.95	
	Beam Angle		Beam Angle		Beam Angle	
	Comp	Dim	Comp	Dim	Comp	Flex-Beam
Model	A1	300	A1	300	P1	4000
					P2	7000
					P3	9000
					P4	60
					P5	3000


TRIM DIMENSION

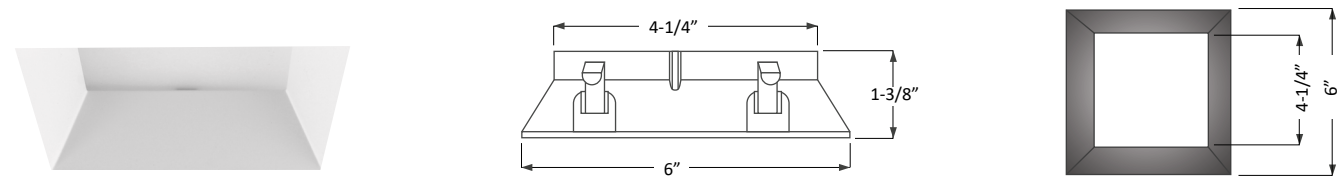


LED HOLDER & FILTER DIMENSION

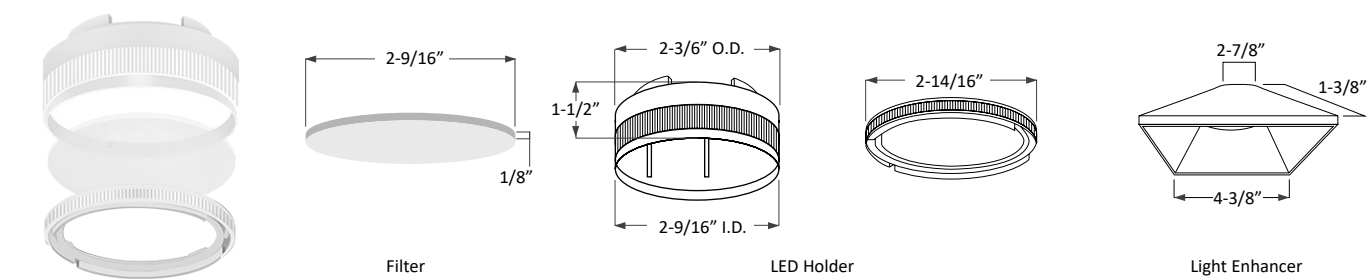

HOUSING DIMENSION

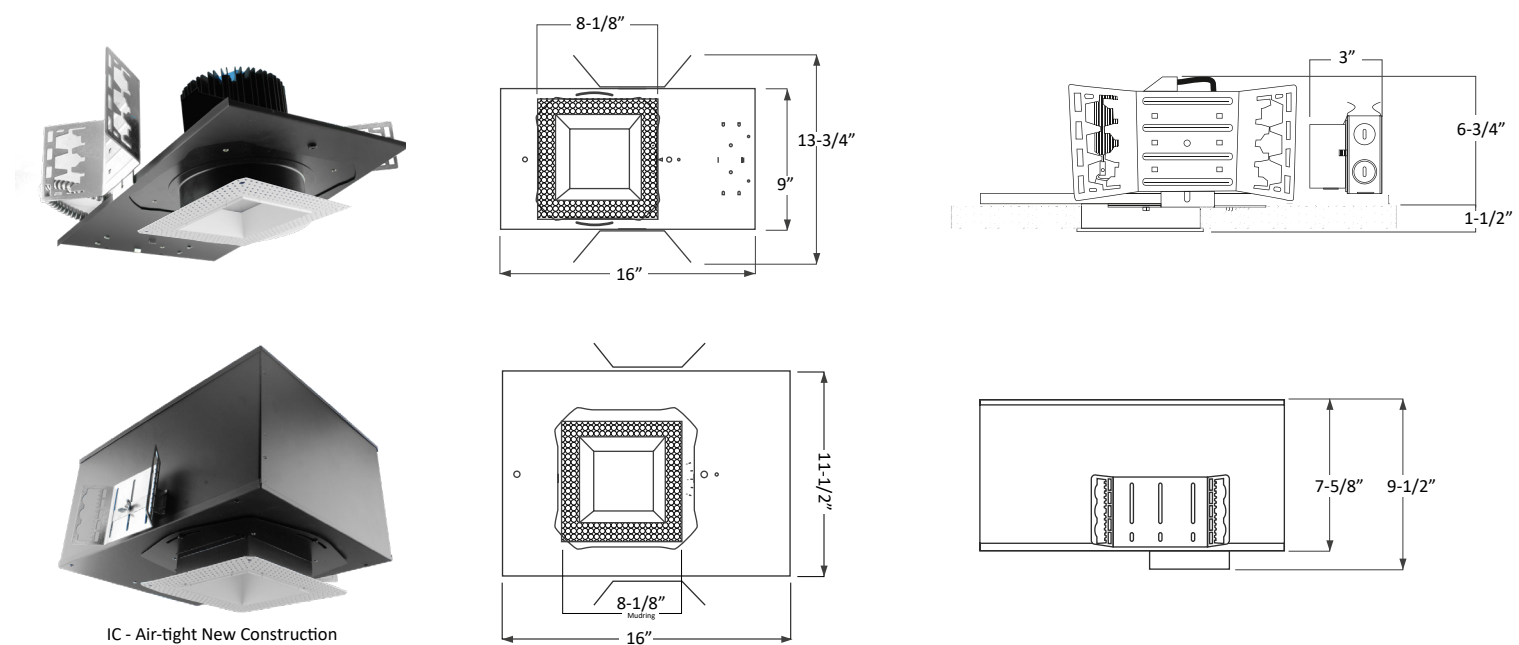


COLLAR DEPTH PER CEILING THICKNESS

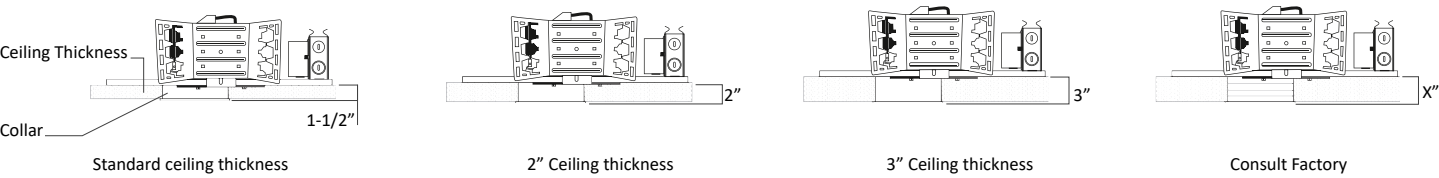

FRAME ACCESSORIES

B

Flat Bar Hanger




27"

1/2"

C


C Channel Bar Hanger



25-3/16"

1-6/16"

UNIVERSAL BAR HANGER

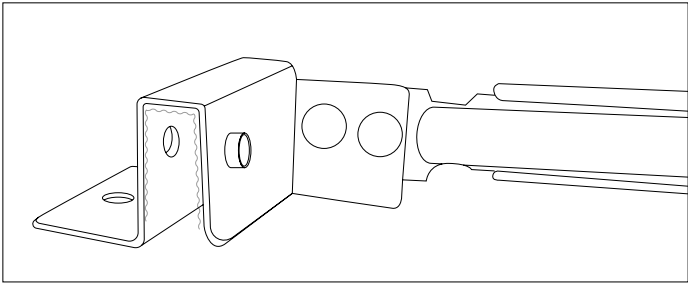

Compatible Ceiling

- Hat Channel

- T-Bar

- C Channel

- Laminated Wood

- Quick-Span

- I-Beam

- Standard Joist