


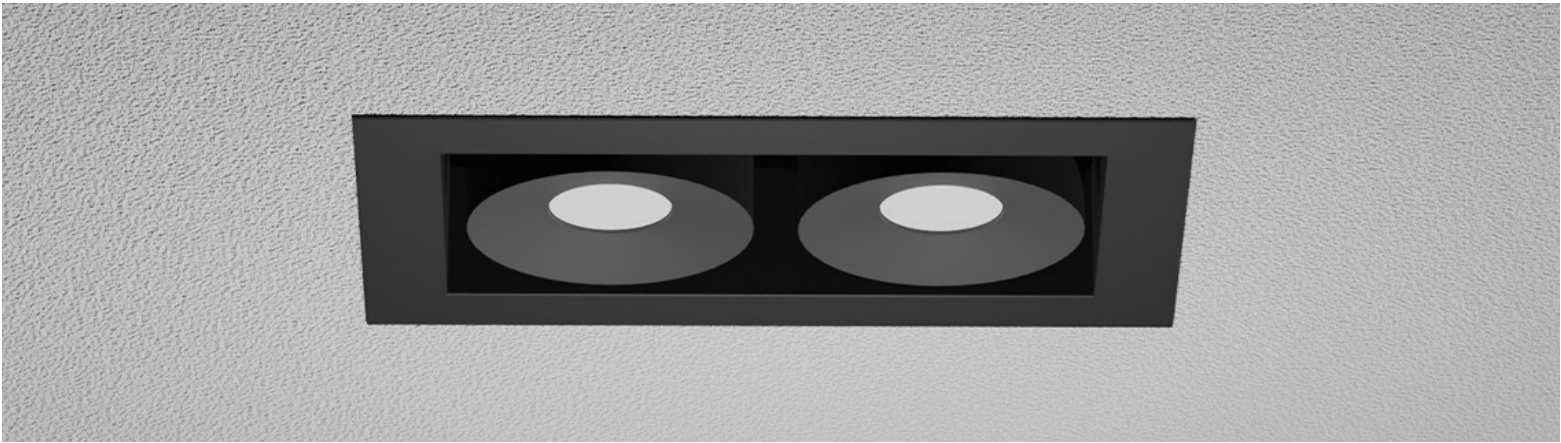

USE OF PRODUCT

The Elevate Architectural Recessed Multiple Series offers a point source solution that is available in a single gimbal with retractable yoke. Offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance.

LED MODULE

Cree LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. LED module is field replaceable.

FRAME CONSTRUCTION

Constructed from 20 gauge cold rolled steel with powder coat finish.

ADJUSTMENT

Single gimbal (45° Tilt) with retractable yoke and 360° rotation. both mechanisms are lockable.

OPTICS

Field replaceable TIR optics available in 12°, 22°, 27°, 35° and 45°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING

Available in 7 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V.

(EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are integral and are field replaceable.

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

MOUNTING

Mounts directly to junction box.

LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- 5 Year limited warranty



ORDERING INFORMATION



RPM							Family	Mounting types	Module Configuration	Module Size/Lumens	Color Temperature	Optical Lens	Voltage	Dimming	Optical Lens	Filter	Trim Type	Frame Finish
Series	Aperture Size	Mounting Types	Module Configuration	Module Size/Lumens	Color Temperature	Voltage												
RPM	M - medium	RF - Recessed Flange	1 - One module 2 - Two module 3 - Three module 4 - Four module 4S - Four module w/ Square Config. MTO - Made to order	8L - Medium module in 800 lm 11L - Medium module in 1175 lm 16L - Medium module in 1650 lm 21L - Medium module in 2100 lm	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	UNV - 120-277V 120 - 120V												
Elevate Series																		

Dimming	Optical Lens	Filter	Module Type	Note
ID Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	12 - 12°	None - Leave blank	R ¹ - Regress	1. Standard
PEQ0 Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming	22 - 22°	F - Frosted filter	B - Bevel	
LDE1 Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	27 - 27°	H - Honey comb	S - Snoot	
L3DA Hi-lume 1% EcoSystem/3-Wire L3D Driver	35 - 35°	S - Solite filter		
EEI eldoLED Eco 1% Dim (0-10V)	45 - 45°			
EDIO eldoLED Solo 0.1% Dim (0-10V)				
EDID eldoLED Solo 0.1% Dim (DALI)				



Housing Type	Frame Accessories	Interior Housing Finish	Module Finish	Bevel/Flange Finish	Options
IC - IC Air-tight New Construction	AH - Adjustable bar hanger	B - Black	B - Black	WW - White/White	EM - Emergency Battery
ICP - IC New Const. Chicago Plenum	C - C Channel bar hanger	W - White	W - White	BB - Black/Black	
NC - Non-IC New Construction	B - Flat bar hanger	S - Silver	S - Silver	BW - Black/White	
		MTO - Made to order	MTO - Made to order	SW - Silver/White	
				SS - Silver/Silver	
				MTO - Made to order	

DIMENSION/CONFIGURATION



One module





Two module





Three module

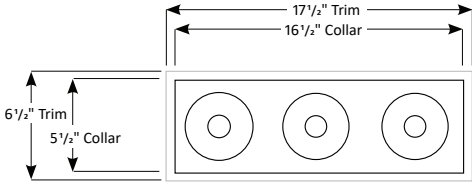

Four module

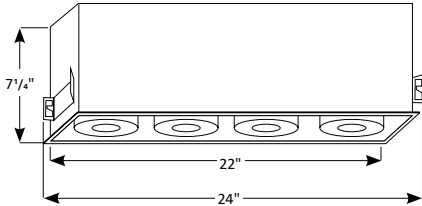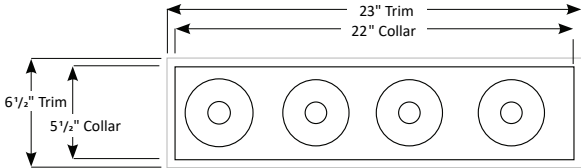

Four module

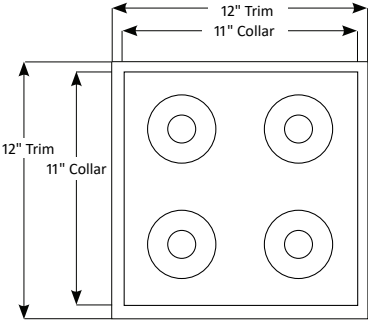

LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
10W	890 lm	120 - 277V	93+
14W	1175 lm	120 - 277V	93+
20W	1650 lm	120 - 277V	93+
30W	2100 lm	120 - 277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
**Lumens will vary based on CCT, optical lens, and bevel finish.

OPTICAL LENS




12°, 22°, 27°, 35°, 45°

FILTERS




H - Honey comb F - Frosted filter S - Solite filter


MODULE TYPE



B - Bevel



R - Regress



S - Snoot