ELEVATE MUTIPLES

ARCHITECTURAL CABLE SUSPENDED

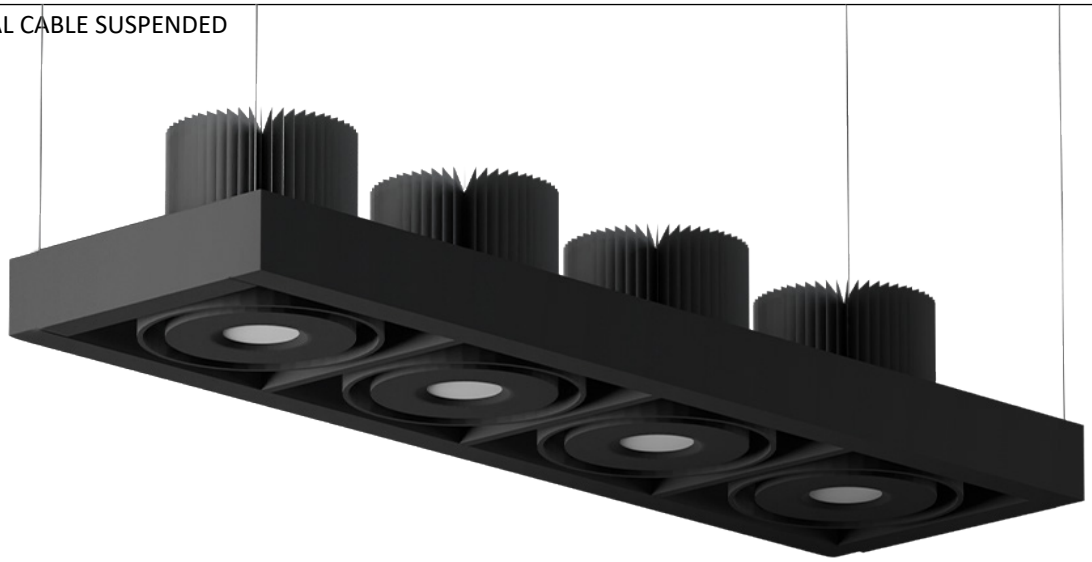

USE OF PRODUCT
The Elevate Mutiple Series offers a architectural point source solution. Offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance. This product is for indoor use only.

LED ENGINE
LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

FRAME CONSTRUCTION
Constructed from heavy duty aluminum with powder coat finish.
Extruded Frame Dimensions: 1.50" x 1.50" x .125"

ADJUSTMENT
Double gimbal adjustment with locking mechanism. 35° X 35° HH.

OPTICS
Field replaceable TIR optics available in 12º, 22º, 27º, 35º, and 45º. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING
Available in 7 (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are field replaceable.

THERMAL MANAGEMENT
Ambient temperatures at fixture location should not exceed -20° to 40°C.

MOUNTING
Suspended ceiling mount with aircraft cable.

LABELS/COMPLIANCE/WARRANTY
- CSA Listed for US and Canada
- Damp rated
- 5 Year limited warranty

ORDERING INFORMATION

RPM – _____ – _____ – _____ – _____ – _____ – _____ – _____ – _____ – _____ – _____ – _____ – _____

Housing Size · Profile · Mounting types · Module Configuration · Lumens Per Head · Color Temperature · Voltage · Dimming · Optical Lens · Filter · Trim Type · Frame Finish

Series	Housing Size	Profile	Mounting Types	Module Configuration	Lumens Per Head	Color Temperature	Voltage
RPM ELEVATE MUTIPLES Series	**M** - medium	**150** - 1.50"	**CS**[1] - Cable suspended	**4R** - Four module, remote driver	**8L** - 890 lm **11L** - 1175 lm **16L** - 1650 lm **21L** - 2100 lm	**27** - 2700K **30** - 3000K **35** - 3500K **40** - 4000K	**UNV** - 120-277V **120** - 120V

Dimming		Optical Lens	Filter	Trim Type	Frame Finish
ID[2]	Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	**12 -** 12º **22** - 22º **27** - 27º **35** - 35º **45** - 45º	**None** - Leave blank **F** - Frosted filter **H** - Honey comb **S** - Solite filter	**B** - Bevel **R** - Regress **S** - Snoot	**B** - Black **MTO** - Made to Order
PEQ0	Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming				
LDE1	Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming				
L3DA	Hi-lume 1% EcoSystem/3-Wire L3D Driver				
EEI[4,5]	eldoLED Eco 1% Dim (0-10V)				
EDIO[4,5]	eldoLED Solo 0.1% Dim (0-10V)				
EDID[4,5]	eldoLED Solo 0.1% Dim (DALI)				

Note
1. 5ft standard cable length.
2. Intelligent Drive is the standard driver.
3. 120V only.
4. Must specify logarithmic or linear eldoLED diver.
5. Confirm dimming curve: linear or logarithmic.

Integer Lights continually works to improve products and reserves the right to make changes which may alter the performance, appearance or specification of products.

ELEVATE MUTIPLES

LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
10W	890 lm	120 - 277V	93+
14W	1175 lm	120 - 277V	93+
20W	1650 lm	120 - 277V	93+
30W	2100 lm	120 - 277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
**Lumens will vary based on CCT, optical lens, and bevel finish.

DIMENSION







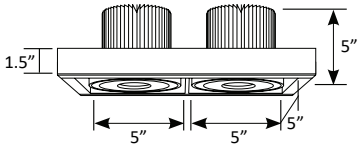

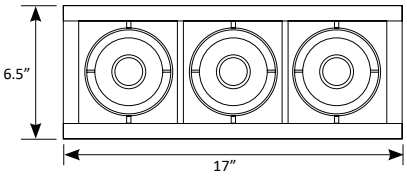

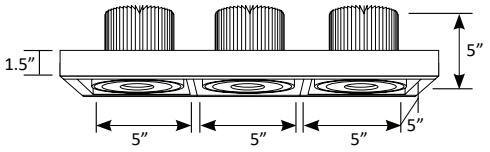

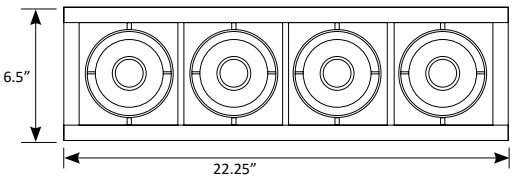

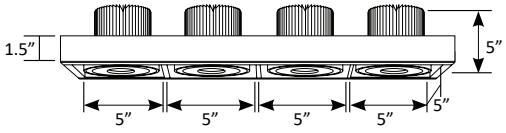



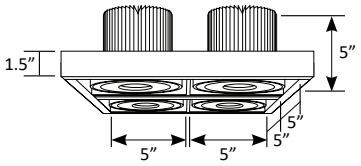

OPTICAL

12°, 22°, 27°, 35°, 45°

FILTERS

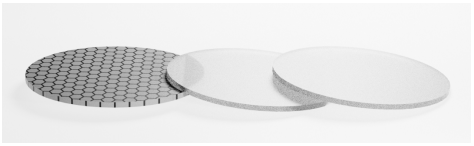

H - Honey comb **F** - Frosted filter **S** - Solite filter

TRIM TYPE

B - Bevel



R - Regress

S - Snoot

Integer Lights continually works to improve products and reserves the right to make changes which may alter the performance, appearance or specification of products.